


Sensei PRO™

FH-100-U

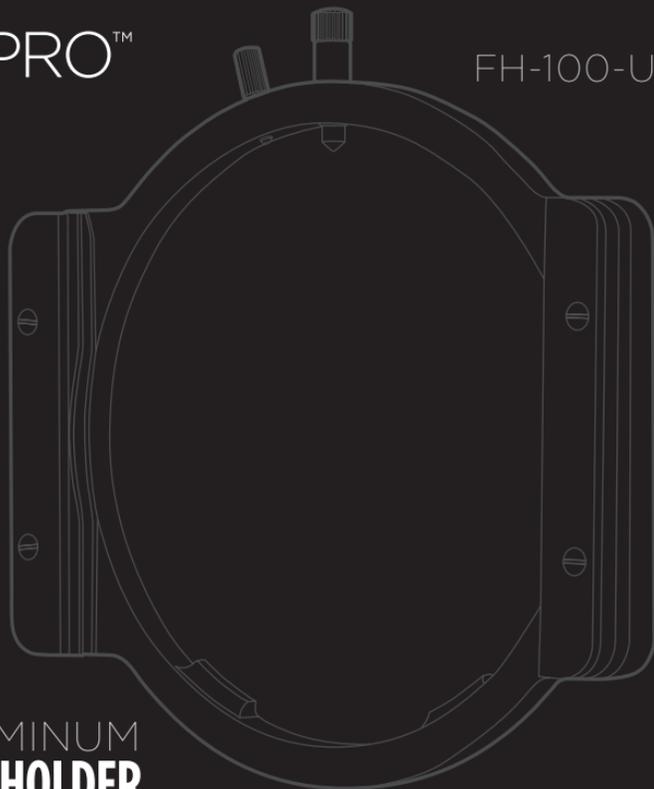

AIRCRAFT ALUMINUM
UNIVERSAL FILTER HOLDER


for 100mm Filters - with Extra Security Lock

User Manual


Thank you for choosing Sensei Pro

The FH-100-U is a universal filter holder that allows the use of standard 4 x 4 (100mm) and 4 x 6 (100 x 150mm), 2mm thick filters with virtually any lens when using the appropriate adapter ring. It quickly and easily mounts onto the lens and is capable of holding two filters simultaneously. It can be adapted to include an additional slot for a third filter with the included film clips. The holder can smoothly rotate a full 360° and is ideal for users employing graduated or neutral density filters for landscape photography. There is no vignetting on lenses up to 10mm on crop-sensor cameras, and 16mm on full-frame cameras. Anodized aluminum construction provides durability and the film clips are designed to hold filters securely in place.


Overview

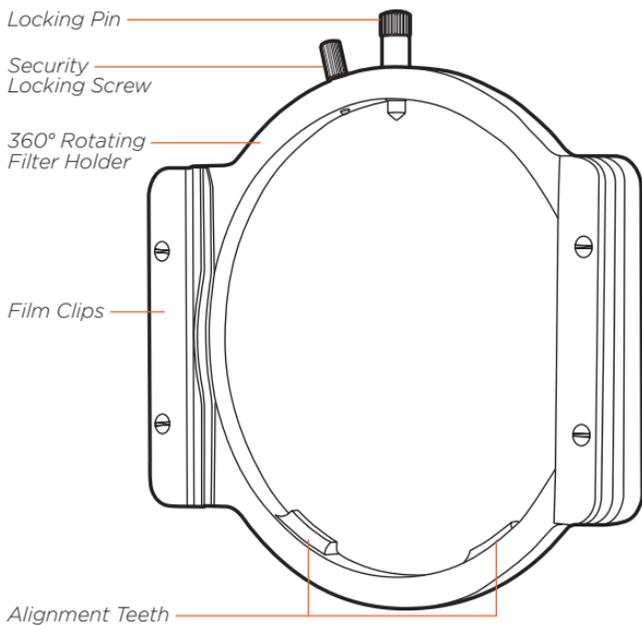

Additional Film Clips and Screws

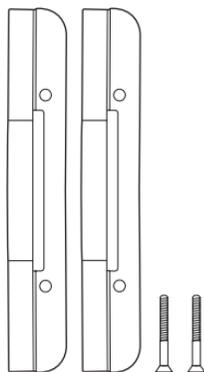

Instructions



Mounting the Filter Holder


1. Align the adapter ring (not included) with the lens, making sure that the branding on the adapter ring faces inward toward the camera.

2. Screw the adapter ring onto the lens until tight.




3. Align the filter holder with the adapter ring so that the locking pin is on top, and the film clips face away from the camera.

4. Angle the top of the filter holder away from the camera and fit the alignment teeth on the bottom of the filter holder into the groove of the adapter ring.




5. Pull up on the locking pin and move the top of the filter holder over the adapter ring and release the locking pin.

6. Make sure the edge of the filter holder is flush with the edge of the adapter ring, and that the filter holder is securely in place before proceeding.



7. For additional security, tighten the locking screw by turning it clockwise.

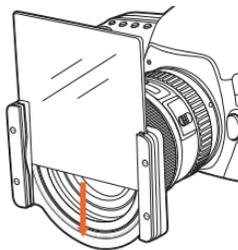


8. Install a filter into the holder by sliding it into position between the film clips. Due to the snug fit, the filter may have to be slightly jiggled to glide into the clips.

Note: Do not use excessive force that can damage the filter or the holder.


Note: When rotating the filter holder, friction from the locking pin may cause some noise. This is normal and will not affect the performance of the FH-100-U.

Once the filter is installed, its position can be adjusted for optimum performance by sliding it up and down or rotating it.

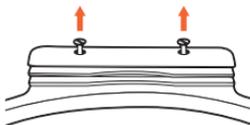


Adding a Third Filter


1. Using a 5/64 flathead screwdriver, carefully remove the screws from the film clips.

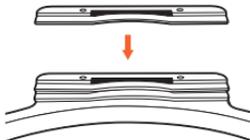


2. Remove the top clips and insert the extra film clips by placing them under the top clips.

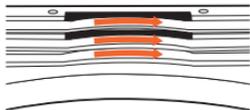

3. Make sure the new clips are oriented similarly to the other clips so that the curve of the clips is bending away from the base.

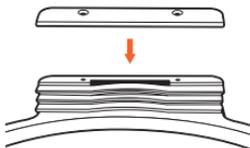

4. Replace the top clips by placing them on top of the newly added clips. As in the previous step, make sure the curve is oriented similarly with the other clips.

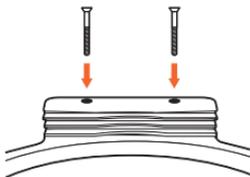

5. Replace and securely screw in the clip screws. If it is taking too much effort to insert a filter, check the orientation of the clips to make sure they are all curving in the same direction.

Note: At the 45° rotation, vignetting will occur when using three filters.

One-Year Limited Warranty

This SENSEI product is warranted to the original purchaser to be free from defects in materials and workmanship under normal consumer use for a period of one (1) year from the original purchase date or thirty (30) days after replacement, whichever occurs later. The warranty provider's responsibility with respect to this limited warranty shall be limited solely to repair or replacement, at the provider's discretion, of any product that fails during normal use of this product in its intended manner and in its intended environment. Inoperability of the product or part(s) shall be determined by the warranty provider. If the product has been discontinued, the warranty provider reserves the right to replace it with a model of equivalent quality and function.

This warranty does not cover damage or defect caused by misuse, neglect, accident, alteration, abuse, improper installation or maintenance. EXCEPT AS PROVIDED HEREIN, THE WARRANTY PROVIDER MAKES NEITHER ANY EXPRESS WARRANTIES NOR ANY IMPLIED WARRANTIES, INCLUDING BUT NOT LIMITED TO ANY IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. This warranty provides you with specific legal rights, and you may also have additional rights that vary from state to state.

To obtain warranty coverage, contact the Sensei Customer Service Department to obtain a return merchandise authorization ("RMA") number, and return the defective product to Sensei along with the RMA number and proof of purchase. Shipment of the defective product is at the purchaser's own risk and expense.

For more information or to arrange service, visit www.madebysensei.com or call Customer Service at 212-594-2353.

Product warranty provided by the Gradus Group.

www.gradusgroup.com

SENSEI is a registered trademark of the Gradus Group.

© 2015 Gradus Group LLC. All Rights Reserved.

