

LED-6800

256 LED ON-CAMERA LIGHT

USER MANUAL



G *genaray*[™]

LED-6800 INTRODUCTION

Thank you for choosing the Genaray LED-6800 On-Camera Light. This product will provide you with powerful, portable and dependable illumination that can be used in a variety of settings. Featuring a super-bright 256 LED lamp count, 5800K color temperature, flicker-free, dimmable features and two removable filters with advanced light dispersion capabilities, the Genaray LED-6800 On-Camera Light is the perfect choice for professional photographers and videographers alike.

KEY FEATURES

- Lightweight Design With Powerful 256 Lamp Count
- Long Profile Provides Wider Angle Of Coverage
- Removable Diffuser & 3200K Warming Filter
- Low Battery Power Warning Light
- Vertically Stackable

PRODUCT CONTENTS

- 256 LED Light
- Slide-In Diffuser
- Slide-In Warming Filter
- NP-F750 Battery
- AC/DC Battery Charger
- AC Adapter
- Ball Head Mount
- Manual

SAFETY WARNINGS

- Do not attempt to disassemble, repair or perform any unauthorized modifications on device
- Do not handle with wet hands, immerse in liquids or expose to water and rain; electric shock or fire may result
- Device contains small parts which may pose a choking hazard; keep out reach of children
- Do not operate device in presence of flammable gas or vapors
- Do not use product if it emits smoke or a strange odor; disconnect power source immediately to avoid personal injury and contact place of purchase
- Observe caution when handling batteries; only use batteries approved by the manufacturer of this product
- Batteries are prone to leakage when fully discharged; to avoid damaging product be sure to remove batteries when leaving product unattended
- Do not intentionally stare or gaze at

LED light panel for prolonged periods while device is on


- Do not cover the ventilation grille found at the rear of device when in operation and ensure light is cool before storing
- Do not use or leave device in conditions of extreme heat, severe cold or high humidity
- Unit will display a decrease in brightness when the battery runs

low; be sure to replace battery when necessary to avoid affecting recording quality

- When cleaning the device, use only a mild detergent solution and quickly wipe dry with a soft cloth
- Please dispose of used batteries, packaging and old devices in accordance with appropriate environmental regulations

PRODUCT OVERVIEW



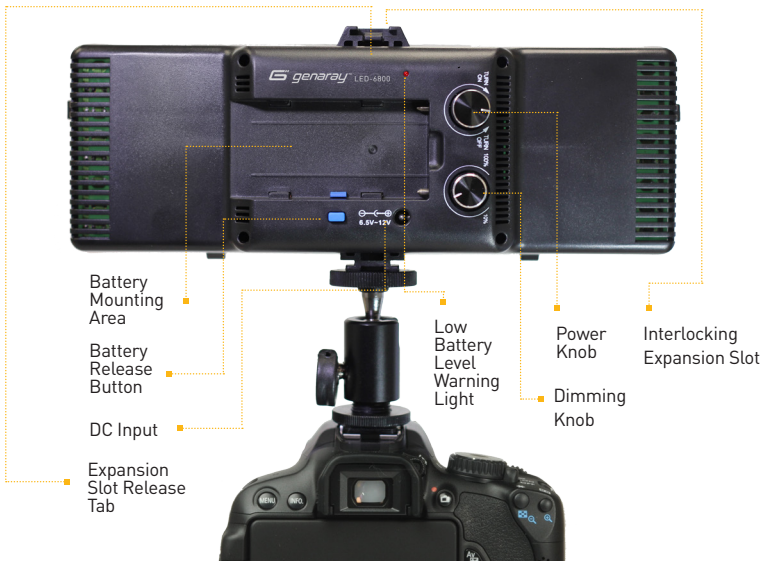

MOUNTING LIGHT UNIT DIRECTLY ON CAMERA OR TRIPOD

- Begin by positioning light directly atop camera or video camera
- Slide cold shoe mounting into shoe of camera
- For tripod installation, simply insert 1/4 20 screw found on tripod head into the 1/4 20 threading mount found on bottom of unit; then tighten securely

Note

Light can also be fastened to included ball head mount, which can then be installed on cold shoe found on cameras or similar devices; see ball head mounting instructions

MOUNTING LIGHT UNIT ON BALL HEAD MOUNT

- Included ball head mount is designed to provide user with a 180° tilt/360° rotating angle feature that can be used on both cameras and other devices featuring a cold shoe
- Begin by inserting 1/4 20 screw found atop ball head mount into the 1/4 20 threading found on bottom of LED light unit and fasten securely
- Tighten adjustment locking knob so light unit does not wobble during remainder of mounting process
- Ensure cold shoe foot is firmly secured to ball head mount device and loosen locking collar found on base of ball head device
- Slide entire male cold shoe into female cold shoe of camera or other mounting device; then fasten locking collar securely

INTERLOCKING WITH OTHER LED DEVICES

- Loosen adjustment locking knob by twisting counterclockwise and rotate ball head mount to position light at desired angle; twist locking knob clockwise to hold light unit firmly in position

Note

Cold shoe mount can also be removed to reveal an integrated 1/4 20 threading mount

- To reveal ball head mount's integrated 1/4 20 threading mount for fastening to tripod, twist locking ring resting above cold shoe counterclockwise until entire shoe comes out; insert 1/4 20 screw found on tripod head into the 1/4 20 threading mount; then tighten securely

- Slide cold shoe mounting into interlocking expansion slot of another compatible Genaray LED light device
- To separate stacked units, press down on the release tab found at the bottom of the expansion slot to allow the cold shoe of the other unit to slide out
- Compatible Genaray LED light devices can be mounted atop one another in a stacked vertical format for increased illumination

POWERING DEVICE

- Begin by holding fully-charged battery in position over mounting area, leaving only a small gap between conductor contacts found on battery and metal prongs found on unit
- Push battery down and lock into place by sliding it inwards along grooves until an audible click is heard
- The power port found on rear of monitor connects directly to the AC/DC power adapter and can provide continuous power in the event that the battery is low
- Turn the power dial to the right until it clicks into the on position
- Rechargeable battery can be removed by firmly pushing down on the battery release button and sliding the battery to the side until it disengages

ADJUSTING FEATURES

- To adjust the flicker-free dimmable features, simply rotate the dimming wheel until desired effect is achieved
- To install the 3200K warming or the soft diffusion filter, align filter with clasps found on edge of LED panel; ensure that filter tab is facing downwards and slide filter alongside clasps; gently snap filter in place

CUSTOMER SUPPORT

- For more information about this product or to contact the Genaray Customer Support Center with any questions, please send your email correspondence to: info@genaray.com.

PRODUCT SPECIFICATIONS

Bulb Type: 256 Daylight LEDs

Brightness: 1900 lux @ 3'

Color Temperature: 5800K

Voltage: 6.5-12V

Weight: 0.71 lbs

Dimension: 10" x 4" x 2.25"

ONE-YEAR LIMITED WARRANTY

Genaray provides a limited warranty that this product is free from defects in materials and workmanship to the original purchaser under normal use for a period of one (1) year from the original purchase date or thirty (30) days after replacement, whichever occurs later (the "Warranty Period"). Our responsibility with respect to this limited warranty shall be limited solely to repair or replacement, at its option, of any product which fails during normal consumer use. To obtain warranty coverage during the Warranty Period, contact your place of purchase ("Seller") to obtain a return merchandise authorization ("RMA") number, and return to Seller the defective product along with proof of purchase and the RMA number. This warranty does not extend to damage or failure which results from misuse, neglect, accident, alteration, abuse, improper installation or maintenance. EXCEPT AS PROVIDED HEREIN, GENARAY MAKES NEITHER ANY EXPRESS WARRANTIES NOR ANY IMPLIED WARRANTIES, INCLUDING BUT NOT LIMITED TO ANY IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. This warranty provides you with specific legal rights, and you may also have additional rights which vary from state to state. © Copyright 2013 Genaray