

Thank you for choosing Kopul.

The CMX-2 is a compact and lightweight two-channel XLR audio adapter ideal for recording professional-quality audio from two sources and mixing them for output to any camera with a stereo 3.5 mm mic input. It attaches to the base of a camera or camcorder, and a threaded socket on its base allows for mounting on a tripod.

Two balanced XLR input jacks accept signals from a wide variety of mic or line sources such as balanced microphones, wireless microphones, preamplifiers, and external audio mixers. The input levels of each channel are easily controlled with the dual trim control knobs. An aux input is ideal for connecting wireless devices with a 3.5 mm output such as a smartphone or MP3 player. The passive design doesn't require batteries or power for operation and ensures superb sound quality. A ground switch (GND) prevents unwanted hum or noise from affecting the sound.

CMX-2

DSLR Solutions
XLR ADAPTER
2-Channel



Instructions

LINE/MIC switch: When using microphones and wireless systems, select the MIC setting. When recording from a mixer or other audio device, use the LINE setting.



GND1/GND2: Set the switch to GND 1. If you hear a hum or buzz caused by a ground loop, switch to GND2 to eliminate the noise.

Mono/Stereo (M/S): When recording one channel, use the mono (M) setting. The signal will be sent to both left and right channels. When recording two channels, use the stereo (S) setting. The level of each channel can be controlled individually.

Aux input (AUX): the signal from an external device is sent to the right channel. Do not use the right XLR input when using the Aux input.

Output (OUT): Use the included stereo 3.5 mm mini-plug cable to attach to the mic input of your camera or camcorder.

Overview

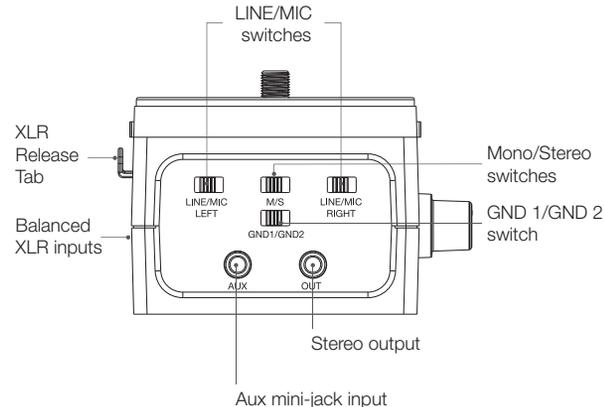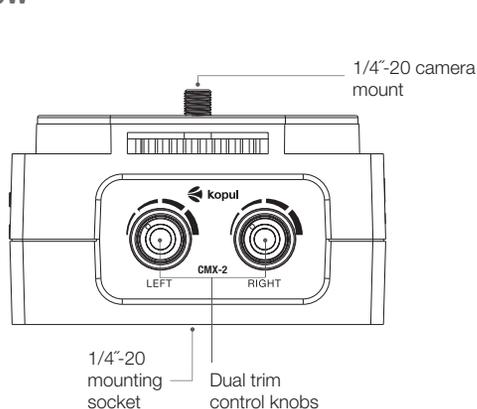

Specifications

Input level	Mic: -35 dBu Line: -10 - +4 dBu
Frequency response	20 Hz to 20 kHz (\pm 0.5 dB)
Dimensions (W x D x H)	3.4" x 3.1" x 2" (8.7 x 8.0 x 5.2 cm)
Weight	6.7 oz. (191 g)

One-Year Limited Warranty

This KOPUL product is warranted to the original purchaser to be free from defects in materials and workmanship under normal consumer use for a period of one (1) year from the original purchase date or thirty (30) days after replacement, whichever occurs later. The warranty provider's responsibility with respect to this limited warranty shall be limited solely to repair or replacement, at the provider's discretion, of any product that fails during normal use of this product in its intended manner and in its intended environment. Inoperability of the product or part(s) shall be determined by the warranty provider. If the product has been discontinued, the warranty provider reserves the right to replace it with a model of equivalent quality and function.

This warranty does not cover damage or defect caused by misuse, neglect, accident, alteration, abuse, improper installation or maintenance. EXCEPT AS PROVIDED HEREIN, THE WARRANTY PROVIDER MAKES NEITHER ANY EXPRESS WARRANTIES NOR ANY IMPLIED WARRANTIES, INCLUDING BUT NOT LIMITED TO ANY IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. This warranty provides you with specific legal rights, and you may also have additional rights that vary from state to state.

To obtain warranty coverage, contact the Kopul Customer Service Department to obtain a return merchandise authorization ("RMA") number, and return the defective product to Kopul along with the RMA number and proof of purchase. Shipment of the defective product is at the purchaser's own risk and expense.

For more information or to arrange service, visit www.kopulcables.com or call Customer Service at 212-594-2353.

Product warranty provided by the Gradus Group.
www.gradusgroup.com



KOPUL is a registered trademark of the Gradus Group. © 2015 Gradus Group LLC. All Rights Reserved.