

OWNER'S MANUAL



UIM-2X

**XLR to USB Interface
with 1/4" Adapter**




Contents

Quick User Controls Guide	2
Getting Started	4
Headphone Output for Direct Monitoring	4
Assigning UIM-2X to a Computer.....	4
Specifications	5
Troubleshooting	5
System Requirements.....	6
Accessories	6
Service Information	6
Warranty	7

Thank you for choosing the Nady UIM-2X, an easy-to-use USB audio interface that enables you to connect any microphone or guitar to your computer.

Quick User Controls Guide

- | | |
|--|--------------------------------------|
| 1. XLR Input Jack | 5. 48V Phantom Power Selector |
| 2. Bi-color Input Indicator
<i>Blue = Microphone, Green = Line</i> | 6. LED 48V Indicator |
| 3. Input Level Selector <i>Microphone or Line</i> | 7. USB Connector Cable Jack |
| 4. LED Function Indicator
<i>Left = Record, Right = Playback</i> | 8. 1/8" Headphone Output |
| | 9. USB Connector Cable |
| | 10. 1/4" Input Jack |

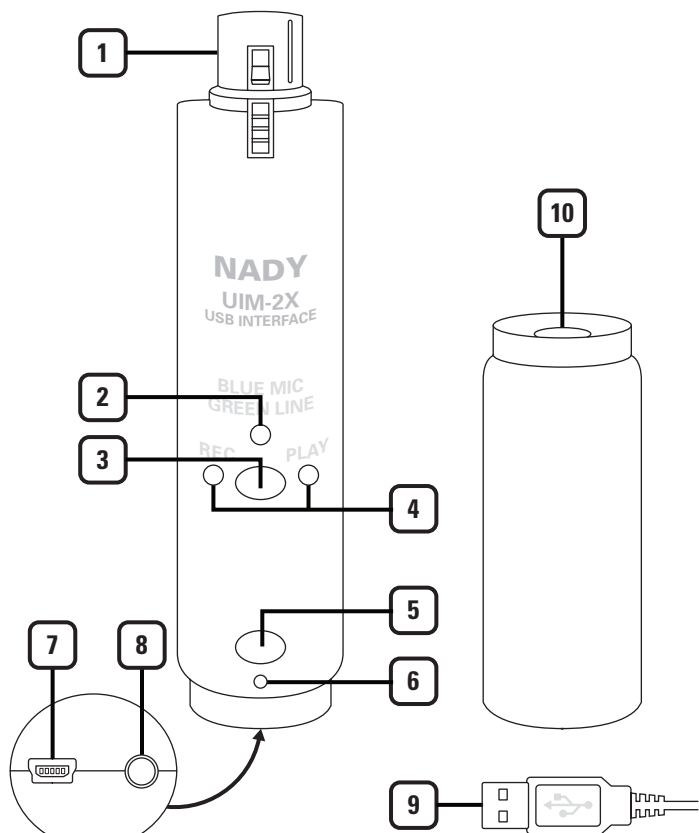

Getting Started

1. Connect microphone to **XLR Input (1)**.
2. If using UIM-2X with a ¼" jack, connect the supplied ¼" **Adapter (10)**.
3. Connect UIM-2X to a powered USB port using supplied **USB Cable (9)**.
4. Press **Input Level Selector (3)** according to what is being connected to computer. Blue LED for XLR (Mic) and Green LED for ¼" (Line).
5. If using a condenser microphone that requires phantom power, press **48V Phantom Power Selector (5)**.

Headphone Output for Direct Monitoring

The **1/8" Headphone Output (8)** allows for monitoring of the input signal while recording, without latency (delay that occurs when recording).

Caution: Be sure to connect headphones to the 1/8" jack before putting on ears.

Assigning UIM-2X to computer

Windows

1. Open Control Panel
2. Open Sounds and Audio Devices
3. In the Audio tab, find "USB Audio Codec" for Sound playback and Sound recording

Macintosh

1. Open System Preferences
2. Open Sound Preference
3. Select "USB Audio Codec" for the Input and Output tab

Specifications

Frequency Response	20Hz to 20,000Hz
Power requirements	USB powered
Sampling Rate	Up to 48KHz
Bit Depth	16 bit
Headphone Output	1/8" (3.5mm)
Input	XLR or 1/4"
LED Color Indicators	Input: Blue = Mic Green = Line Rec/Play: Left = Record Right = Play 48V: Phantom power selector

Troubleshooting

Problem	Solution
No indicator lights	Verify USB port is 1.1 or 2.0
No sound in headphones	Verify UIM-2X is selected in Control Panel/System Preferences
Sound is distorted	Lower the volume in recording program
No sound from microphone	Make sure 48V is selected if using a condenser microphone
Sound is too low	<ol style="list-style-type: none">1. Raise the volume in recording program2. Make sure correct input level is selected—green for line, blue for mic

System Requirements

USB USB 1.1 or 2.0, powered

RAM 64MB minimum

Operating System Windows XP or later, Mac OS X 10.1 or later

Accessories

- USB cable (18" and 6.25 ft.)
- ¼" line level to XLR adapter

Service Information

In the U.S. If you are experiencing operational problems with your system, please refer to the Support page at www.nady.com for assistance. Should your wireless system require service, please contact the Nady Service Department at (510) 652-2411 to obtain a Return Authorization (R/A) Number and service quote (if out of warranty). Make sure the R/A Number is clearly marked on the outside of the package that you are returning.

If your unit is out of warranty, please enclose a cashier's check or money order (or pay by credit card) per instructions by the Nady Service Department. Ship your unit prepaid to: Nady Systems, Service Department, 6701 Shellmound Street, Emeryville, CA 94608. Include a brief description of the problem you are experiencing. For service of a unit under warranty, please follow the instructions in the following section.

Outside the U.S. For service and warranty matters please contact the Nady distributor in your country through the dealer/store from which you purchased this product.

One-Year Limited Warranty

Nady Systems, Inc. warrants to the original consumer purchaser that the unit is free from any defects in material or workmanship for a period of one year from the date of original retail purchase. If any such defect is discovered within the warranty period, Nady Systems, Inc. will repair or replace the unit free of charge, subject to verification of the defect or malfunction upon return to Nady Systems. Please do not return your Nady product to the store where it was purchased as Nady Systems handles your warranty service directly. Communication with our Service Department is the most efficient means of servicing your unit and we are dedicated to keeping you a satisfied customer.

To the extent permitted by law, any applicable implied warranties, including warranties of merchantability and fitness are hereby limited to one year from the date of purchase. Consequential or incidental damages resulting from a breach of any applicable express or implied warranties are hereby excluded. This warranty is in lieu of all other agreements and warranties, general or special, express or implied and no representative or person including a Nady dealer, agent, or employee is authorized to assume for us any other liability in connection with the sale or use of this Nady Systems' product.

Whereas some states do not allow limitations on how long implied warranties last, and do not allow exclusion of incidental or consequential damages, the above limitations and exclusions may not apply to you. This warranty gives you specific legal rights and you may also have other rights which may vary from state to state.

This warranty is subject to the following conditions:

- 1) This system must have been purchased from an authorized Nady dealer and all warranty service must be performed by Nady's service department. Any service not performed by Nady will automatically void this warranty.
- 2) Items not covered: physical damage resulting from improper handling of the unit in transit from the factory by the shipper (Nady Systems is not responsible for such damage and all such claims must be made against the shipping company by the consignee); defects caused by normal wear of the product (expendable parts are typically connectors, cables, potentiometers, switches and similar components); damage or defects caused by abuse, neglect, accident, failure to connect or operate the unit in any way that does not comply with applicable technical or safety regulations, or improper repair, excessive heat or humidity, alteration or unreasonable use of the unit, causing cracks, broken cases/housings or parts; damage caused by leaking batteries; finish or appearance items; items damaged in shipment en route to Nady Systems, Inc. for repair. The warranty is null and void if any Nady serial number has been removed or defaced.

How To Obtain Service:

- 1) If factory service is required, please contact our Service Department at (510) 652-2411 for a return authorization (R/A) number. Make sure the R/A number is clearly marked on the outside of your package. (Please note: if an R/A number is not included, our Shipping Department cannot accept your package.)
- 2) Send the unit back to Nady Systems, 6701 Shellmound Street, Emeryville, CA, 94608, freight pre-paid. You must include proof of date and place of purchase (i.e., photocopy of your bill of sale) or Nady cannot be responsible for repair or replacement. Nady Systems, Inc. will not repair, nor be held responsible, for any units returned without proper identification, return address, and R/A number clearly marked on the package.
- 3) Per the above, Nady will perform all warranty service and return the unit to you at no charge. Nady Systems will inform the buyer if product sent in does not meet the terms of this warranty and will provide a quote for fixing the unit and/or shipping it back exclusively at the buyer's expense.



6701 Shellmound Street | Emeryville, CA USA 94608

T 510.652.2411 | **F** 510.652.5075 | **www.nady.com**