



TMS-135

Studio Monitor Stands

(Pair)

Owner's Manual



Introduction

Thank you for choosing Auray TMS-135 Studio Monitor Stands. These sturdy monitor stands are ideal for project and home studios alike. Each stand has a top monitor mounting plate measuring 9" square and is capable of supporting monitors up to 90 lb. The triangular base features a 17" spread offering stability while easily fitting into tight spaces. Adjustable rubber pads and included adjustable leveling spikes ensure steadiness on most types of floor surfaces.

The height of each stand is adjustable from 36" to 54" and has six preset heights at 3" intervals. The ergonomic locking knob and the added security of the locking pin ensure solid stability at whatever height is selected. The foam strips on the mounting plate keep monitors securely in place and help reduce unwanted vibrations.

Warnings

- Please read and follow these instructions and keep this manual in a safe place.
- Handle this product with care.
- Keep this product away from water and all flammable gasses or liquids.
- Make sure that this product is intact and that there are no missing parts.
- Make sure everything is secure before proceeding.
- Do not exceed the maximum load capacity.
- Keep fingers clear of the telescoping joint when adjusting length.
- To avoid damage to your monitor stand, be careful not to overtighten the bolts or the locking knobs.
- All photos are for illustrative purposes only.

Overview

Monitor mounting plate 1

Telescoping shaft 2

Locking knob 3

Locking pin 4

Base with rubber feet 5


Shaft mounting plate 6

Socket screws (2) 7

Leveling Spikes (3) 8

Cable guides (2) 9

Allen key 10

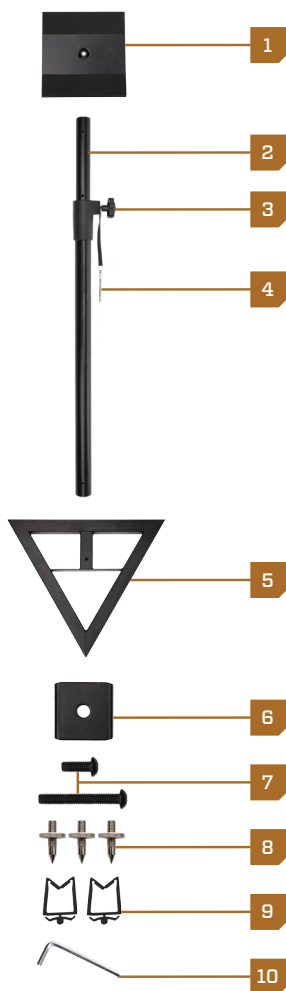

Assembly Instructions

1. Hold the telescoping shaft vertically with the lock on the top.
2. Align the monitor mounting plate with the indented hole fitting into the top of the shaft. Insert the shorter socket screw. **1**
3. Tighten the socket screw with the Allen key. **2**
4. Insert the longer bolt through the center hole in the triangular base with the bolt cap on the same side as the rubber feet. **3**
5. Align the hole of the shaft mounting plate with the bolt and place it over the base so that it fits snugly against the center tube. **4**
6. Turn the stand upside down and rest it on the mounting plate.
7. Holding the bolt and the shaft mounting plate in place, put the base onto the shaft aligning the bolt with the threaded hole. **5**
8. Securely tighten the bolt with the Allen key.
9. Once all of the bolts are secure, place the stand upright on its base.

Note: Do not overtighten. Tightening the socket screw until snug will adequately secure the mounting plate.



Operating Instructions

Important: Make all height and location adjustments before mounting your monitors onto the stands.

Adjusting the height

1. Loosen the locking knob. **1**
2. Raise or lower the telescoping shaft to the desired height and insert the locking pin through the hole.
3. Lower the shaft until it rests on the locking pin. Tighten the locking knob. **2**



Mounting the monitors

1. Once you've set the height of the stand, you can safely mount the monitor on the mounting plate. **3**
2. Use the cable guides to secure the speaker cables by inserting them into the guide loops. **4 5**



Changing the feet

The TMS-135 Studio Monitor Stands include adjustable leveling spikes for stability on carpeted surfaces. To replace the rubber feet with the leveling spikes, do the following:

1. Turn the stand upside down.
2. Unscrew the three rubber feet.
3. Screw in the three leveling spikes. **6**
4. Place the stand upright on its base and adjust the leveling spikes to conform to the surface. **7**



Recommended accessories

IP-M: Auray Isolation Pad for Studio Monitor (Medium, Single)

IPRS-M: Auray Stabilizing Isolation Pad for Studio Monitors
(Medium, Single)

S0508-10-B: Pearstone 0.5 × 8" Touch Fastener Straps (Black, 10-Pack)

RC1002-05-B: Pearstone 1 × 2" Rapid Close Wall-Mountable Cable Ties
(Black, 5-Pack)

Specifications

Minimum height: 36" (91 cm)

Maximum height: 54" (137 cm)

Load capacity: 90 lb. (40.8 kg)

Plate size: 9" × 9" (23 × 23 cm)

Weight: 8.4 lb. (3.8 kg) each

Base spread: 17" (43 cm)

One-Year Limited Warranty

This AURAY product is warranted to the original purchaser to be free from defects in materials and workmanship under normal consumer use for a period of one (1) year from the original purchase date or thirty (30) days after replacement, whichever occurs later. The warranty provider's responsibility with respect to this limited warranty shall be limited solely to repair or replacement, at the provider's discretion, of any product that fails during normal use of this product in its intended manner and in its intended environment. Inoperability of the product or part(s) shall be determined by the warranty provider. If the product has been discontinued, the warranty provider reserves the right to replace it with a model of equivalent quality and function.

This warranty does not cover damage or defect caused by misuse, neglect, accident, alteration, abuse, improper installation or maintenance. EXCEPT AS PROVIDED HEREIN, THE WARRANTY PROVIDER MAKES NEITHER ANY EXPRESS WARRANTIES NOR ANY IMPLIED WARRANTIES, INCLUDING BUT NOT LIMITED TO ANY IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. This warranty provides you with specific legal rights, and you may also have additional rights that vary from state to state.

To obtain warranty coverage, contact the Auray Customer Service Department to obtain a return merchandise authorization ("RMA") number, and return the defective product to Auray along with the RMA number and proof of purchase. Shipment of the defective product is at the purchaser's own risk and expense.

For more information or to arrange service, visit www.aurayaudio.com or call Customer Service at 212-594-2353.

Product warranty provided by the Gradus Group.
www.gradusgroup.com

