




Digital Housing

Supplemental Instructions

6241.34 Canon A3400 IS

6241.40 Canon A4000 IS

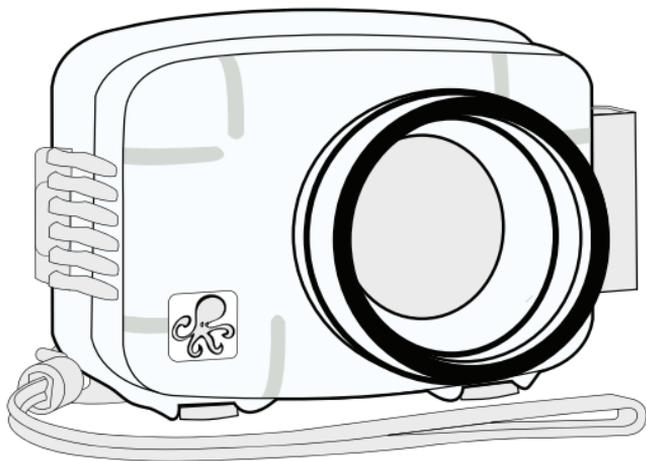

Size and Weight

Width6.2 in. (157mm) including controls

Height4.6 in. (117mm) including controls


Depth3.7 in. (94mm) including controls & lens port

Weight1.2 lb. (544g)


BuoyancySlightly positive in fresh water

Parts of the Housing

Front View

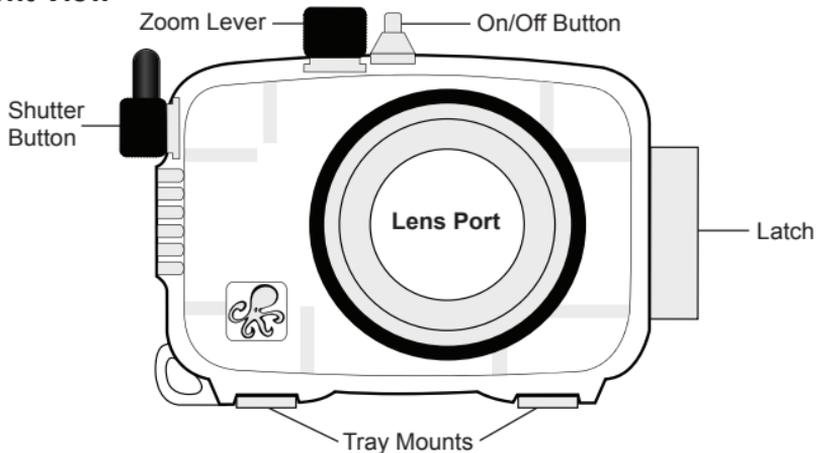

Back View

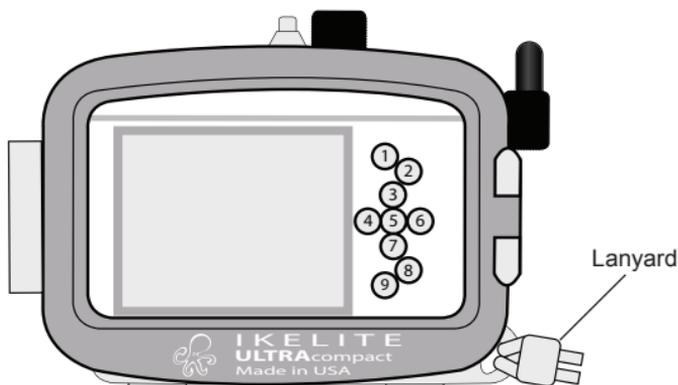

- | | |
|-------------------------|---------------------------------|
| 1. Movie Button | 6. Flash / Right Button |
| 2. Help Button | 7. DISP. Display / Down Button |
| 3. Auto / Erase Button | 8. MENU Button |
| 4. Macro / Left Button | 9. Playback Button |
| 5. FUNC/SET Button | |

Initial Camera Settings

- Insert fully charged battery and formatted SD card.
- Set Date and Time.
- Set Mode to “P” Program.
- Set ISO to 100 and White Balance to auto “AWB.”
- Set the Square to “Single Shot.”
- Set Resolution to “L” and “1280.”
- Set AF Frame to “Center” and Digital Zoom to “Off.”
- Set AF Point Zoom to “Off” and Servo AF to “Off.”
A strobe focusing light is recommended to assist AF underwater.
- Set Lamp Setting to “Off” and Red-Eye Correction to “Off.”
- Set Light Metering to “Center Weighted.”
- Set Review to “5 Seconds” and Review Info to “Off.”
- Set Blink Detection and Grid Lines to “Off.”
- Set IS Mode to “Continuous” and Powered IS to “On.”
- Set Flash to “On  flash always fires.”

Note: Enable Macro  mode when shooting close-up subjects. If overexposure occurs, back away from the subject and zoom in.

External Accessory Lenses

Ikelite W-20 Wide-Angle Conversion Lens 6420 (A4000 IS only)

The front of the lens port accepts the 6420 W-20 and other 67mm threaded wide angle or macro/diopter lenses without the need for an adapter. An external wide angle conversion lens increases angle of coverage so you can get closer to the subject while still fitting everything in the frame.

Moderate vignetting will occur at widest angle camera lens setting with these lenses. Zoom in to eliminate, or crop the image in post processing.

Note: Wide-Angle conversion lenses will appear off-centered and should NOT be used with the A3400 IS. This is due to the camera’s CCD chip placement. Macro adaptors can be zoomed to eliminate vignetting.


Bayonet mount lenses cannot be used with this housing.

AF35 Strobe Package 4035

The AutoFlash AF35 kit is a great compliment, and an effortless, affordable way to add a flash to your new Ikelite point and shoot camera system. Everything you need to get started is in the box. Just attach it to the bottom of your housing and start taking pictures!

AF35 AutoFlash kit includes:

AF35 strobe - Flex arm - AutoFlash sensor
Handle with rubber grip - Tray (single or dual)
Mounting hardware.

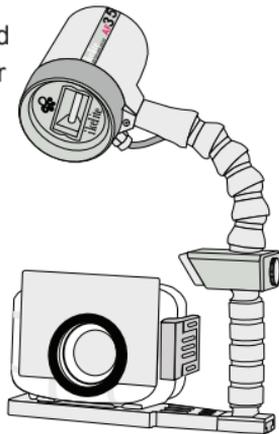

A full range of accessories is available to support your housing. Please visit www.ikelite.com to see the most current information about recommended accessories for your housing.

Ikelite Technical Support

Email: ikelite@ikelite.com

Phone 317.923.4523

Fax 317.924.7988



Ikelite Underwater Systems
50 West 33rd Street
Indianapolis, IN 46208 USA
www.ikelite.com

6241.34_Canon_A3400IS_1-0312

6241.40_Canon_A4000IS_1-0312